




112 Church Street Extension, Flemington, New Jersey 08822 (908) 782-4000 Fax: (908) 782-0990

TECHNICAL DATA SHEET

**HS 165
(TS PET)**

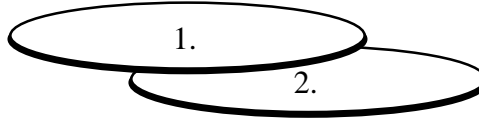

Description: 0.0005" Heat Sealable Polyester (2.) bonded to 0.001" Aluminum Foil (1.). Can be supplied laminated to pulpboard or cardstock.

Feature: HS 165 will provide a peelable Tamper-Indicating seal on the rim of PVC and PET containers.

SPECIFICATIONS

Liner Type	Thickness [in/ mm]	Deviation[in/mm]
HS 165-35	0.0365" / 0.093mm	+/- 0.0003"/0.0089mm

Backing Material	Thickness [in]
Pulpboard	0.020" /0.51mm; 0.030" / 0.76mm; 0.035" /0.89mm; 0.040" /1.02mm
Cardstock	0.007"/0.178mm; 0.008"/203mm

Good Resistance to: Aqueous Media, Oils, Alcohols, and Weak Acids

Poor Resistance to: Amines, Some Solvents

**Original Date: 10/31/00
Revised Date: 06/20/01
Revision Number: 1**

Code of Federal Regulations Compliance: Complies to the following CFR's

21CFR177.1630 Polyesters

FDA Status: The component materials of HS 165 are listed under DMF 1378

The aforementioned technical information and any recommendation are based on Tri-Seal's Laboratory Findings and are believed to be true and accurate, but we strongly recommend that our customers perform appropriate tests they feel necessary to ensure the compatibility and stability of any given product with ours. Tri-Seal, a Tekni-Plex Co. guarantees to replace any quantity proved to be defective. We will not be held liable for any injury, loss or change, whether direct, incidental or consequential, due to the use of or inability to use the product due to a breach of warranty of any agreement between Tri-Seal and the purchaser. Unless contained in this data sheet or agreed to in writing by the officers of the seller and user no other warranty will be honored.