




900 Bradley Hill Road, Blauvelt, New York 10913 (845) 353-3300 FAX: (845) 353-3376

TECHNICAL DATA SHEET

**TRI-LAM®
LSC-217**

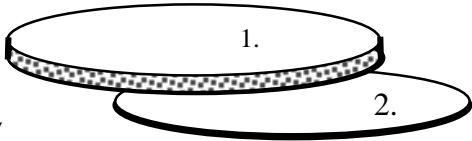

Description: 0.0005” Clear Polyester Is Coated On The Reverse side with Polyvinylidene Chloride and Permanently Bonded To TRI-SEAL Three-ply Co-extruded F-217.

SPECIFICATIONS

AVAILABLE IN VARIOUS DENSITIES

Product	Density lb/ft ³	Density g/cc
LSC-217	30 +/- 2	0.48 +/- 0.03
LSC -217-36	36 +/- 2	0.58 +/- 0.03
LSC -219	19 +/- 2	0.30 +/- 0.03
LSC -217	25 +/- 2	0.40 +/- 0.03

Construction

Thickness			Available Web Width		
Minimum in (mm)	Maximum in (mm)	Deviation in (mm)	Minimum in (mm)	Maximum in (mm)	Deviation In (mm)
0.020 (0.51)	0.065 (1.65)	+/-0.005(0.13)	1.0 (25.40)	18.0 (457.20)	+/-1/16(1.59)
0.070 (1.78)	0.090 (2.29)	+/-0.007(0.18)	1.0 (25.40)	09.0 (228.60)	+/-1/16(1.59)

Code of Federal Regulations Compliance: Complies to the following CFR’s

- 21CFR177.1520: Olefin polymers.
- 21CFR177.1210: Closures with sealing gaskets for food containers.
- 21CFR178.2010: Antioxidants and or stabilizers for polymers.
- 21CFR175.300: Resinous and polymeric coatings.
- 21CFR 177.1010: Acrylic and modified acrylic plastics, semirigid and rigid.

**Revised Date: 06/18/01
Revision Number: 1**

FDA Status: The component materials of Tri-Lam LSC-217, LSC-217-36, LSC-219 are listed under DMF 2434.

The aforementioned technical information and any recommendation are based on Tri-Seal's Laboratory Findings and are believed to be true and accurate, but we strongly recommend that our customers perform appropriate tests they feel necessary to ensure the compatibility and stability of any given product with ours. Tri-Seal, a Tekni-Plex Co. guarantees to replace any quantity proved to be defective. We will not be held liable for any injury, loss or change, whether direct, incidental or consequential, due to the use of or inability to use the product due to a breach of warranty of any agreement between Tri-Seal and the purchaser. Unless contained in this data sheet or agreed to in writing by the officers of the seller and user no other warranty will be honored.